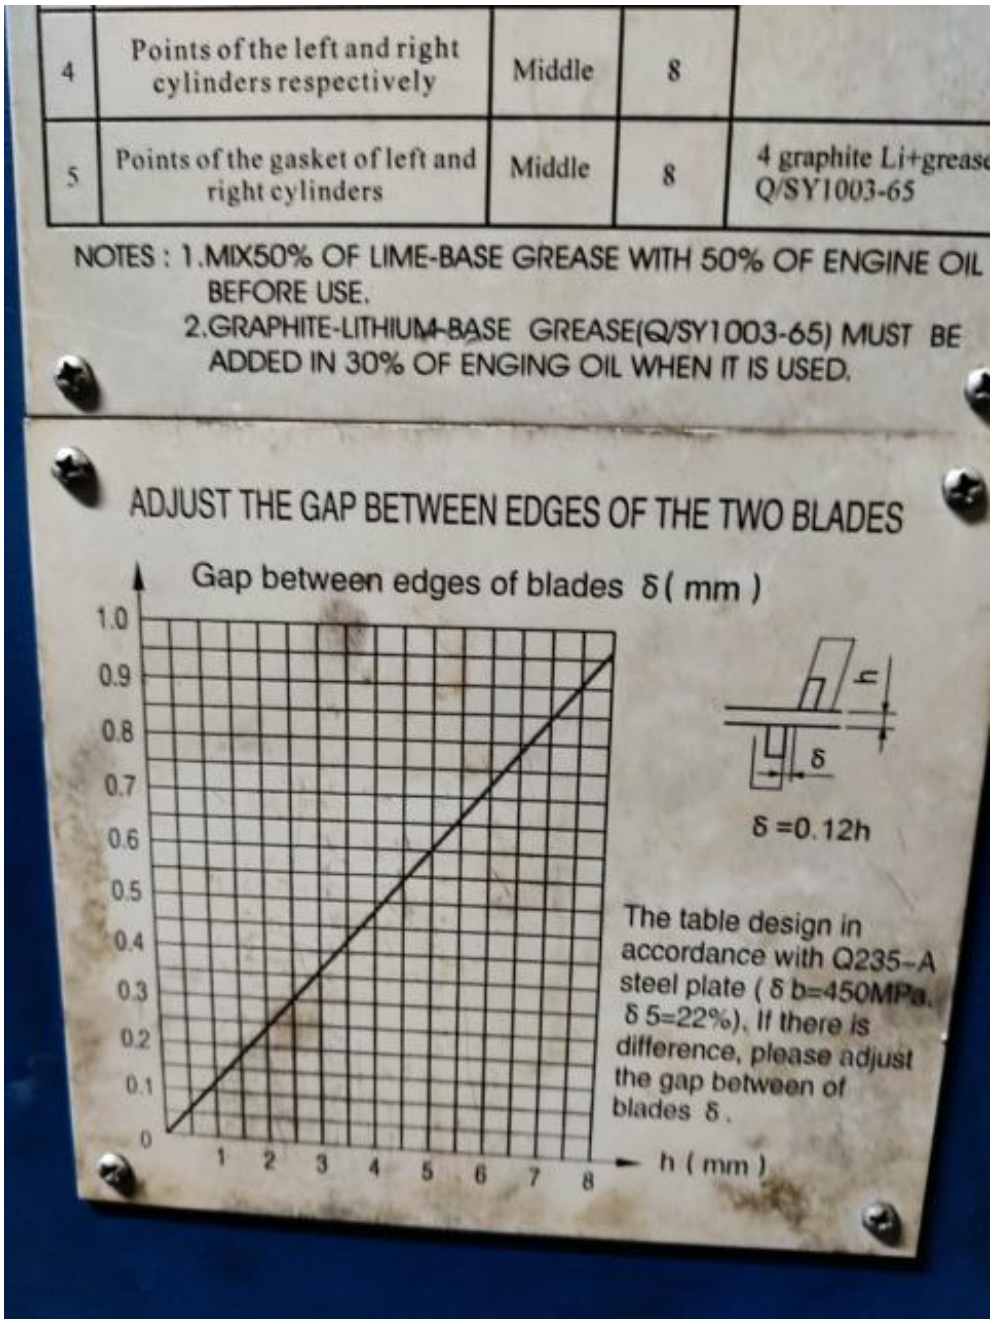
Nůžky > tabulové > HGS 3200/8

Inv. číslo:	109054
Typ:	HGS 3200/8
Parametry:	
Výrobce:	ETC Machinery
Rok výroby/SO/GO:	2005/-/-
Lokalita:	Česká republika
Popis:	Max. délka střihu: 3 200 mm Max. tloušťka plechu: 8 mm (pro konstrukční ocel o pevnosti 450 MPa / Q235-A) Hmotnost stroje: 6 600 kg Napájení a příkon: 3x 380 V / 50 Hz, zdánlivý příkon 11,8 kVA (hlavní motor standardně u této řady 11 kW) Jištění / Krytí: 40 A (jistič 30 A), krytí IP54 Výbava patrná z fotek:Digitální ukazatel polohy zadního dorazu (NC/DRO displej na ovládacím panelu) Manuální rychlé nastavení střižné mezery (0–1,0 mm) pákou na boku stroje Přední podpěrná ramena plechu (3 ks) a pracovní stůl s kuličkovými rolnami Přidržovače plechu s ochrannou mříží Nožní pedál s nouzovým zastavením (STOP) CE certifikace

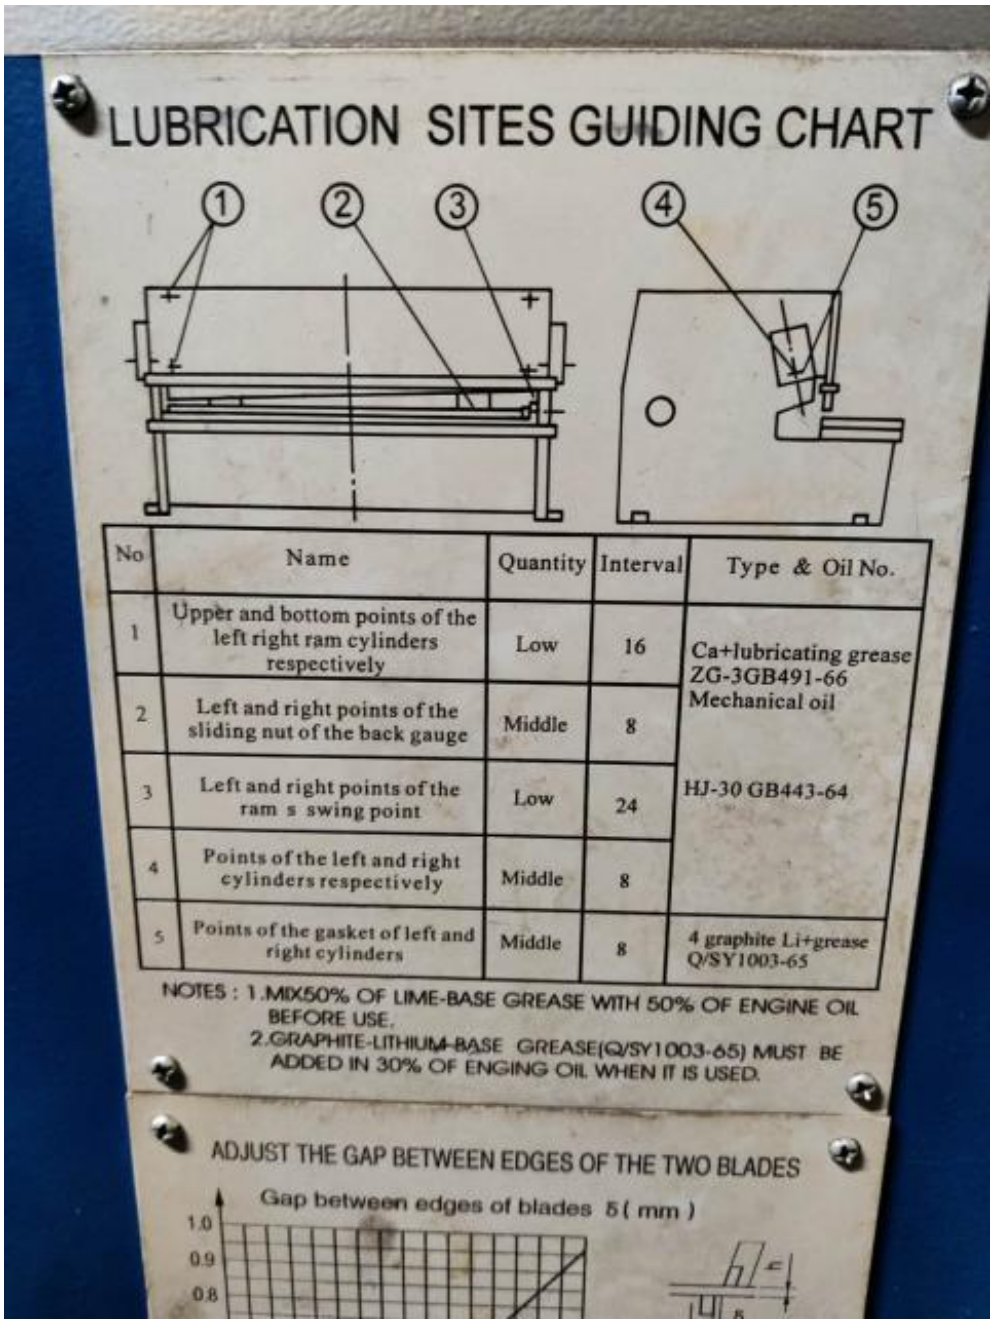

ETC
HGS 3200x8
machinery



4	Points of the left and right cylinders respectively	Middle	8	
5	Points of the gasket of left and right cylinders	Middle	8	4 graphite Li+grease Q/SY1003-65

NOTES : 1.MIX50% OF LIME-BASE GREASE WITH 50% OF ENGINE OIL BEFORE USE.
2.GRAPHITE-LITHIUM-BASE GREASE(Q/SY1003-65) MUST BE ADDED IN 30% OF ENGING OIL WHEN IT IS USED.


CO., LTD.
Y
É NŮŽKY
m
05
G CHART
5
OF THE TWO BLADES



LUBRICATION SITES GUIDING CHART

No	Name	Quantity	Interval	Type & Oil No.
1	Upper and bottom points of the left right ram cylinders respectively	Low	16	Ca+lubricating grease ZG-3GB491-66 Mechanical oil
2	Left and right points of the sliding nut of the back gauge	Middle	8	
3	Left and right points of the ram s swing point	Low	24	HJ-30 GB443-64
4	Points of the left and right cylinders respectively	Middle	8	
5	Points of the gasket of left and right cylinders	Middle	8	4 graphite Li+grease Q/SY1003-65

NOTES : 1.MIX50% OF LIME-BASE GREASE WITH 50% OF ENGINE OIL BEFORE USE.
2.GRAPHITE-LITHIUM-BASE GREASE(Q/SY1003-65) MUST BE ADDED IN 30% OF ENGING OIL WHEN IT IS USED.

ADJUST THE GAP BETWEEN EDGES OF THE TWO BLADES